

Analysis and design of multi-purpose system for measuring electrical power supplied by electric sockets

¹Peter BABIČ, ²Tibor VINCE

^{1,2}Department of Theoretical and Industrial Electrical Engineering, Faculty of Electrical Engineering and Informatics, Technical University of Košice, Slovak Republic

¹ peter.babič@student.tuke.sk, ² tibor.vince@tuke.sk

Abstract — The paper shows process of the analyzing designing and programming of an inter-connected electronic system. It starts with explaining the fundamentals of the physics underlining the electronic power measurement process. The main part includes diagrams describing the inner working of the hardware design and later software solution proposal. Proposed device should be capable of measuring the electric power provided by the electric socket to the appliance and send the measured values over Wi-Fi to the cloud, to be visualised on a custom web server employing a charting library to plot the measured quantities over time.

Keywords — electrical power, measurement system

I. INTRODUCTION

The idea is to invent way of measuring the electrical power and some more related information, preferably in a non-invasive way. The non-invasive way means, that the appliance that is being measured does not require any modifications, for instance in a form of some probe or a man-in-the-middle plug, suggesting an embedded system. When the data are obtained, they are presented to the user, preferably plotted as a quantity over time, not just and actual measurement. Since the solution is going to be multi-purpose, it has to incorporate at least one additional function, than just the measurement. In this case it is going to be the remote power-on/power-off of the appliance. The name of the thesis also suggests that the final solution has to be compatible with the electrical sockets used in the local region, in this case the European ones. Since the solution is going to be an embedded system measuring a physical quantity, these two topics is described in following chapters.

II. ELECTRIC POWER FUNDAMENTALS

In general physics terms, power is defined as the rate at which energy is transferred (or transformed). Electric energy in particular, begins as electric potential energy – what we commonly refer to as voltage. When electrons flow through that potential energy, it turns into electric energy. In most useful circuits, that electric energy transforms into some other form of energy. Electric power is measured by combining both how much electric energy is transferred, and how fast that transfer happens.

The electric power P is equal to the energy consumption E divided by the consumption time t [1]:

$$P = \frac{E}{t} \quad (1)$$

where P is the electric power in watt [W], E is the energy consumption in joule [J] and t is the time in seconds [s].

Electrical Power, in a circuit is the amount of energy that is absorbed or produced within the circuit. A source of energy such as a voltage will produce or deliver power while the connected load absorbs it. Light bulbs and heaters for example, absorb electrical power and convert it into heat or light. The higher their value or rating in watts the more power they will consume.

Ohm's law

Ohm's Law deals with the relationship between the voltage and the current in an ideal conductor. This relationship states that: the potential difference (voltage) across an ideal conductor is proportional to the current through it [2]. The constant of proportionality is called the resistance.

$$I = \frac{U}{R} \quad (2)$$

where I is the current expressed in amperes [A], U is the voltage, bearing the volt units [V] and R is the electrical resistance in ohms [Ω].

The Ohm's law can be further expanded [3], to get these three quantities in relationship with power, such as:

$$P = I \cdot U = I^2 \cdot R = \frac{U^2}{R} \quad (3)$$

Direct current (DC) circuits

Generally, Ohm's law is used on Direct current (DC) circuits, containing a current of fixed magnitude (amplitude) and a definite direction associated with it. Direct current is produced by power supplies, batteries, dynamos and solar cells to name a few.

We also know that DC power supplies do not change their value with regards to time [4], they are a constant value flowing in a continuous steady state direction. In other words, DC maintains the same value for all times and a constant uni-directional DC supply never changes or becomes negative unless its connections are physically reversed.

Direct current (DC) circuits

An alternating function or Alternating current (AC) waveform on the other hand is defined as one that varies in both magnitude and direction in more or less even manner with respect to time making it a "bi-directional" waveform [5]. An AC function can represent either a power source or a signal source with the shape of an AC waveform generally following that of a mathematical sinusoid as defined by

$$F(t) = F_{\max} \cdot \sin(2\pi ft)$$

AC function may be presented also different AC shapes. Some of the typical shapes are presented on Fig. 1.

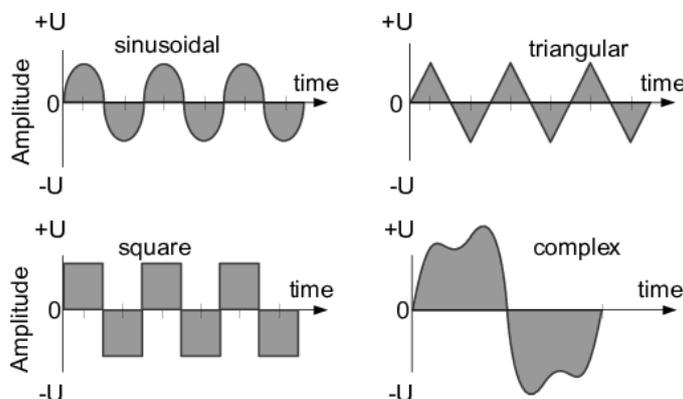


Fig. 1 The common types of waveforms

The term AC or to give it its full description of Alternating Current, generally refers to a time-varying waveform with the most common of all being called a Sinusoid better known as a Sinusoidal waveform. Sinusoidal waveforms are more generally called by their short description as Sine Waves. Sine waves are by far one of the most important types of AC waveform used in electrical engineering.

This means then that the AC waveform is a “time-dependent signal” with the most common type of time-dependent signal being that of the Periodic Waveform. The periodic or AC waveform is the resulting product of a rotating electrical generator. Generally, the shape of any periodic waveform can be generated using a fundamental frequency and superimposing it with harmonic signals of varying frequencies and amplitudes but that is out of the waveform fundamentals theory.

Alternating voltages and currents cannot be stored in batteries or cells like DC can, it is much easier and cheaper to generate these quantities using alternators or waveform generators when they are needed. The type and shape of an AC waveform depends upon the generator or device producing them, but all AC waveforms consist of a zero voltage line that divides the waveform into two symmetrical halves. The main characteristics of an AC waveform [6] are defined as:

Period (T) is the length of time in seconds that the waveform takes to repeat itself from start to finish. This can also be called the Periodic Time of the waveform for sine waves, or the Pulse Width for square waves.

Frequency (f) is the number of times the waveform repeats itself within a one second time period. Frequency is the reciprocal of the time period, defined as $f = \frac{1}{T}$ with the unit of frequency being the Hertz [Hz].

Amplitude is the magnitude or intensity of the signal waveform.

Power in AC circuits

As described above, most common waveform is sine wave, especially in electrical power grid. Therefore following formulas will be based on that assumption. When a reactance (either inductive or capacitive) is present in an AC circuit, the Ohm’s law formula does not apply and different approach must be taken to express and calculate power [7].

Real power (or true power) is the power that is used to do the work on the load:

$$P = U_{RMS} \cdot I_{RMS} \cdot \cos \varphi \quad (4)$$

where P is the real power in watts, U_{RMS} is the Root-mean square (RMS) voltage, I_{RMS} is the RMS current, in amperes and φ is the impedance phase angle - phase difference between voltage and current.

Reactive power on the other hand, is the power that is wasted and not used to do work on the load. Curiously, it is defined as:

$$Q = U_{RMS} \cdot I_{RMS} \cdot \sin \varphi \quad (5)$$

with Q being the reactive power in volt-ampere-reactive [var].

Apparent power is the power that is supplied to the circuit defined by formula:

$$S = U_{RMS} \cdot I_{RMS} \quad (6)$$

where the unit of apparent power S is volt-ampere [VA]. It can be seen that it is not phase-angle dependent.

The relation all these three quantities P, Q, S are in this defined formula:

$$S^2 = P^2 + Q^2 \quad (7)$$

However, nothing in the real world is perfect, and this relation only applies for a perfectly sinusoidal wave-forms!

Power in AC circuits

A phasor [8] is a constant complex number representing the complex amplitude (magnitude and phase) of a sinusoidal function of time. It is usually expressed in exponential form. Phasors are used in engineering to simplify computations involving sinusoids, where they can often reduce a differential

equation problem to an algebraic one. The origin of the word phasor comes from phase + vector. Phasor is a vector that represents a sinusoidal varying quantity, as a current or voltage, by means of a line rotating about a point in a plane, the magnitude of the quantity being proportional to the length of the line and the phase of the quantity being equal to the angle between the line and a reference line. Example of phase shift is drawn on figure Fig. 2.

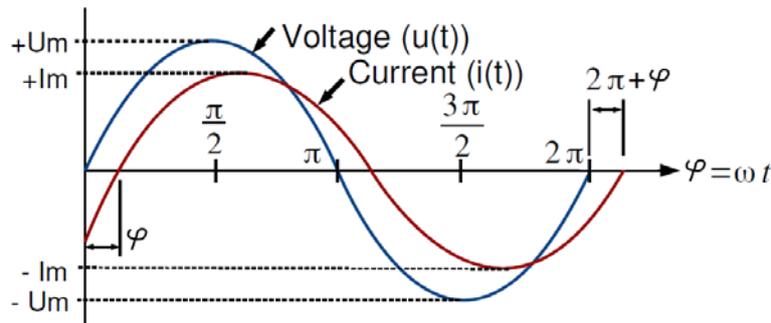


Fig. 2 The phase difference between voltage (blue) and current (red)

Considering the figure Fig. 2, the voltage waveform above starts at zero along the horizontal reference axis, but at that same instant of time the current waveform is still negative in value and does not cross this reference axis until 30° later. Then there exists a Phase difference between the two waveforms as the current cross the horizontal reference axis reaching its maximum peak and zero values after the voltage waveform.

As the two waveforms are no longer in-phase, they must therefore be out-of-phase by an amount determined by phi, φ . The waveform of the current can also be said to be lagging behind the voltage waveform by the phase angle φ . This angle represents the phase shift (also called phase difference) between two sinusoids [9].

Power factor and power factor correction

The power factor is just a specific name for a phase shift between the sinusoids of a current and voltage. So the Fig. 2 in fact shows the power factor. However, it is not expressed in a plane angle, but rather as a dimensionless number between -1 and 1.

The power factor is defined as $\frac{P}{S}$. It is defined as a ratio of the real power over the apparent power [10]. If φ is the phase angle between the current and voltage, then the power factor is equal to the cosine of the angle, $\cos \varphi$.

If the power factor is 1, it means that all the supplied power is completely consumed by purely resistive load. A positive power factor that is lower than 1 indicates that some power is not consumed by the load and is returned back. The lower the factor, the more power is returned. When power factor is equal to 0, the energy flow is entirely reactive, and stored energy in the load returns to the source on each cycle. A negative power factor means that the device, considered to be power load is in fact a power source (produces more power than consumes).

How can this information be useful? Every load with a power factor other than 1 returns some power back to the transmission line. Since the transmission lines do have some resistance, this returned power translates to some wasted power in a form of heat. Energetic companies want to minimize the power wasted in the transmission lines to increase their profit, so numerous laws are coming into effect to correct [11] (increase) the power factor.

III. POWER MEASURING INTEGRATED CIRCUITS

Although it is possible to construct a circuit out of discrete components that would measure [12] the required physical quantities and such a solution would probably be the cheapest solution out there, it would be highly impractical due to multiple reasons.

The most importantly, the obtained accuracy of the measurements would be dependent on the implementation and used components. It is safe to assume, that without multiple design iterations, the accuracy may be too low to be used in practice.

Another point is that, there is no definitive guide, ready to follow, about how to design such circuit. The reason of this is the vast amount of components available on the market and a lot of design considerations to take into account, depending on the requirements.

A special purpose integrated circuits (ICs) are being developed for the exact purpose of measuring the real, apparent and reactive power, the power factor, and in most cases, gathering some other relevant information.

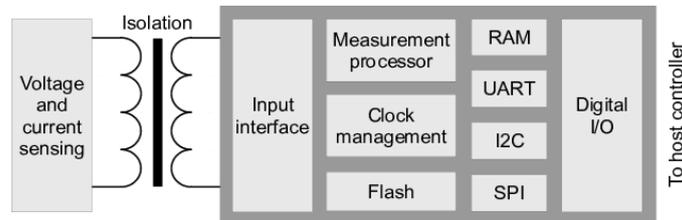


Fig. 3 The phase difference between voltage (blue) and current (red)

From the block diagram on Fig. 3, it can be seen that the power measuring IC is just a specialised microcontroller. It takes the data from the sensing circuitry, which in case of voltage can be measured directly, provided that the galvanic isolation is included, for the sake of safety. The current however, must be measured indirectly. There are three common ways [13] of doing so:

shunt resistor - a resistor with a very small but precise value, that causes a voltage drop with a current passing through it due to the Ohm's law, regardless of frequency. The actual voltage drop is so small, that it can be assumed insignificant, but measurable. However, the voltage drop is still present and may cause some issues, if not taken into account. The advantage is really low price. External galvanic isolation must be provided.

current transformer - a current passing wire inside a current sensing coil. Since it is a magnetic induction based transformer, the galvanic isolation is naturally present. The disadvantage is, that the transformer has a cut-off frequency, below which its effect diminishes rapidly. External magnetic fields can cause problems too. Suitable for measuring current of a fixed (or non-decreasing) frequency.

Hall-effect sensor - a sensor measuring absolute electromagnetic field in a conductor. In contrast to the current transformer, this sensor is able to measure low frequency currents, down to DC, which is a feat that the shunt resistor possesses too. Can be placed anywhere near the current path and doesn't require physical connection, thus providing galvanic isolation too. The price increases with operating currents range and precision.

Using dedicated power measuring IC has another advantage apart from being more accurate. In fact, the part datasheet can be consulted and if all application notes and advices are abided, the specified accuracy can be guaranteed.

IV. EMBEDDED SYSTEM

An embedded system is some combination of computer hardware (HW) and software (SW), either fixed in capability or programmable, that is specifically designed for a particular function [6]. Industrial machines, automobiles, medical equipment, cameras, household appliances, airplanes, vending machines and toys (as well as the more obvious cellular phone and Personal digital assistant (PDA)) are among the myriad possible hosts of an embedded system. Embedded systems that are programmable are provided with programming interfaces, and embedded systems programming is a specialized occupation.

The term embedded system is quite broad, so there is no surprise that the spectrum of used processing units is also wide. Since the general purpose microprocessors require external components, namely memories and peripherals, they tend to consume extra power and a board space. Since the design limitations of an embedded systems are most of the time low physical size, low power

consumption and/or long uptime and ruggedness (more components mean more parts could fail), microprocessors are seldom used. However, most of the commonly used architectures and word lengths are covered. Due to aforementioned reasons, microcontrollers are favored over microprocessors.

ESP8266 Wi-Fi module

The ESP8266 Wi-Fi module is a self-contained System-on-Chip (SoC) with integrated Transmission Control Protocol/Internet Protocol (TCP/IP) protocol stack that can give any microcontroller access to your Wi-Fi network. The ESP8266 is capable of either hosting an application or offloading all Wi-Fi networking functions from another application processor. The ESP8266 module is an extremely cost effective solution, with a huge code-base and community, making it a preferable option for many modern projects, mainly the ones that follow the Internet of Things (IoT) trend.



Fig. 4 The certified ESP-12E module

This module has a powerful enough on-board processing and storage capability that allows it to be integrated with the sensors and other application specific devices through its GPIOs with minimal development up-front and minimal loading during runtime. Its high degree of on-chip integration allows for minimal external circuitry, including the front-end module, is designed to occupy minimal printed circuit board (PCB) area.

V. HARDWARE COMPONENTS

The device under test will be referred to as appliance and the produced device will be referred to as client node (displayed as a simplified schematic in Fig. 6) is already integrated as an ESP-8266 module. The module contains the TCP/IP stack, microcontroller (application processor) running the user program, Wireless local area network (WLAN) and light indication, all in one piece, so this greatly simplifies the design process and allows for more focus on the actual measurement circuitry. The ESP-12E has been chosen as an actual module, because of the available certification [14], which allows it to be introduced to the market later. It was already shown in the Fig. 4. The Pulse-width modulation (PWM) is present there too, so sound indication requires just a sound emitting device.

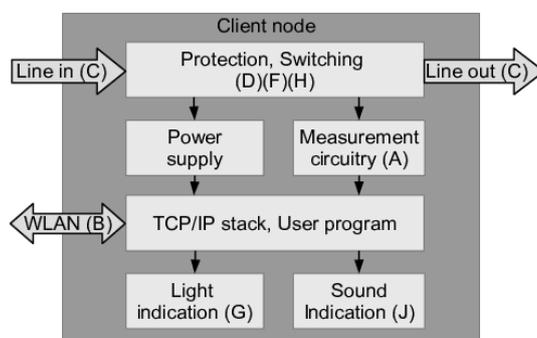


Fig. 5 The proposed block diagram of a client node

Talking about the measurement circuitry, the viable candidate is MAX78615 [15] with the companion IC MAX78700 [16]. The couple should be used, because it provides multiple ways of same voltage level communication with the processor, galvanic isolation via the pulse transformer for improved circuitry protection, great precision, accuracy and utility. The shunt resistor is utilized as a way of obtaining measurements.

For the protection against fire a standard glass fuse or a resettable Positive thermal coefficient (PTC) fuse [17] should be used. Because of the variable nature of most used devices, it is hard to calculate the current consumption of the circuit. It can be measured after the first iteration is manufactured. Thus, the easily replaceable standard glass fuse has been chosen because of its versatility. The circuit protection against high voltage should be solved with an isolated DC-to-DC converter [18] or with a linear transformer coupled with a linear voltage regulator [19]. Since the former one is either expensive or hard to design, and this work does not want to focus on more complexities, the latter option has been chosen.

Choosing the voltage level for the digital electronics (the output voltage of the linear regulator) is straightforward. Since the ESP-12E works on nominal 3.3V, this is the level that has been chosen. Having ICs using the same voltage level removes the need to level-shift the communication between them, thus increasing the simplicity of the design. Design of simplified measurement circuit as a result of analyses described above is shown on Fig. 6.

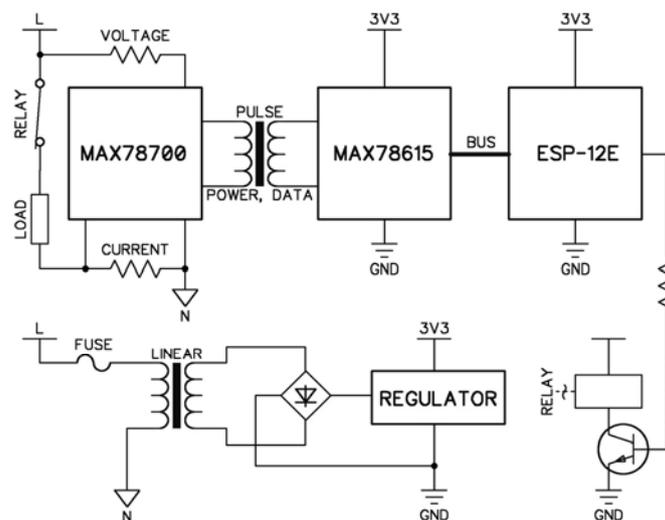


Fig. 6 The proposed block diagram of a client node

VI. CONCLUSION

The paper presents a contribution to a problematic of electrical power measurement. Fundamentals of electrical power calculation and measurement are described. Proposed hardware components present sufficient level of miniaturization and the whole measurement node should be fit in suitable electric socket interface. Electrical measurement circuits MAX78615 in the proposal was chosen. The IC should be able to provide highly accurate electricity measurements of related data, such are Voltage, Current, Frequency, Active, Reactive and Apparent Power/Energy, Power Quality Measurements including Peak Current and Harmonic Content etc. Using ESP8266 family module allows measurement node Wi-Fi communication. That allows receiving measured data and also controlling relay switch remotely via Internet.

ACKNOWLEDGMENT



We support research activities in Slovakia / Project is co-financed from EU funds. This paper was developed within the Project "Centre of Excellence of the Integrated Research & Exploitation the Advanced Materials and Technologies in the Automotive Electronics", ITMS 26220120055

REFERENCES

- [1] R.L. Meade. Foundations of Electronics. *Foundations of Electronics, Circuits and Devices*. Thomson/Delmar Learning, 2002, p. 85. ISBN: 9780766840270.
- [2] T. Henry. Ohm's Law, *Electrical Math and Voltage Drop Calculations*. Henry Publications, 2008.
- [3] H.W. Beaty. *Electric Power Distribution Systems: A Nontechnical Guide*. PennWell nontechnical series. PennWell, 1998, p. 12. ISBN: 9780878147311.
- [4] S.L. Herman. *Direct Current Fundamentals*. Cengage Learning, 2012. ISBN: 9781111127466.
- [5] J.C. Whitaker. *AC Power Systems Handbook*, Third Edition. Electronics Handbook Series. CRC Press, 2006. ISBN: 9781420005813
- [6] A. Nicolaidis. *Electrical and Electronic Principles II*. P.A.S.S, 1996, p. 104. ISBN: 9781872684345
- [7] C. Rawlins. *Basic AC Circuits*. Elsevier Science, 2000. ISBN: 9780080493985
- [8] R.R. Singh. *Electrical Networks*. McGraw-Hill Education (India) Pvt Limited, 2009, pp. 4–13. ISBN: 9780070260962.
- [9] C. Maxfield et al., *Electrical Engineering: Know It All*. Elsevier Science, 2011, pp. 230–233. ISBN: 9780080949666
- [10] J.B. Dixit and A. Yadav. *Electrical Power Quality*. Laxmi Publications Pvt Limited, 2010, pp. 80–81. ISBN: 9789380386744.
- [11] S.N. Singh, *Electric Power Generation, Transmission and Distribution*. PHI Learning, 2008, p. 53. ISBN: 9788120335608.
- [12] A.M. Trzynadlowski. *Introduction to Modern Power Electronics*. Wiley, 2015, p. 85. ISBN: 9781119003229.
- [13] G. Srinivasan, S. Priya, and N. Sun, *Composite Magnetolectrics: Materials, Structures, and Applications*. Woodhead Publishing Series in Electronic and Optical Materials. Elsevier Science, 2015, p. 209. ISBN: 9781782422648.
- [14] LTD - 2ADUI Shenzhen Anxinke technology co. FCC ID 2ADUIESP-12. (Accessed on 14/04/2016) url: <https://fccid.io/2ADUIESP-12>
- [15] Maxim Integrated. MAX78615+LMU Data Sheet. (13/04/2016). Available online: <https://datasheets.maximintegrated.com/en/ds/MAX78615+LMU.pdf>.
- [16] Maxim Integrated. MAX78700 Data Sheet. (13/04/2016). Available online: <https://datasheets.maximintegrated.com/en/ds/MAX78700.pdf>.
- [17] A. Wright, P.G. Newbery, and Institution of Electrical Engineers. *Electric Fuses*, 3rd Edition. Energy Engineering Series. Institution of Engineering and Technology, 2004, p. 15. ISBN: 9780863413995
- [18] J. Carr and J. Carr, *Linear Integrated Circuits*. Elsevier Science, 1996, p. 182. ISBN: 9780080938455
- [19] S. Salivahanan and V. K. Bhaaskaran, *Linear Integrated Circuits*. McGraw-Hill Education, 2008. ISBN: 9780070648180.
- [20] R. Bucko, and J. Molnar: *Programovanie priemyselnych aplikacii 2*, 1. vyd. - Kosice : TU - 2015, ISBN 978-80-553-1964-3
- [21] Ł. Apiecionek, J. M. Czerniak and W. T. Dobrosielski, *Quality of services method as a DDoS protection tool*. In *Intelligent Systems' 2014* (pp. 225-234). Springer International Publishing